Data Sheet

We make sure

FUJITSU COMPUTERS SIEMENS

SCENICVIEW P19-3

Premium Line TFT display – Design meets performance

Issue July 2008

Pages 2

The SCENICVIEW P19-3 combines outstanding picture performance with comfortable ergonomics and elegant design. Premium VA stands for brilliant colors over an extremely wide viewing angle.

Premium VA Panel

- 1500:1 typical Contrast
- 178° typical viewing angle
- 16.7 Mio colors
- Overdrive for 8ms gtg response time

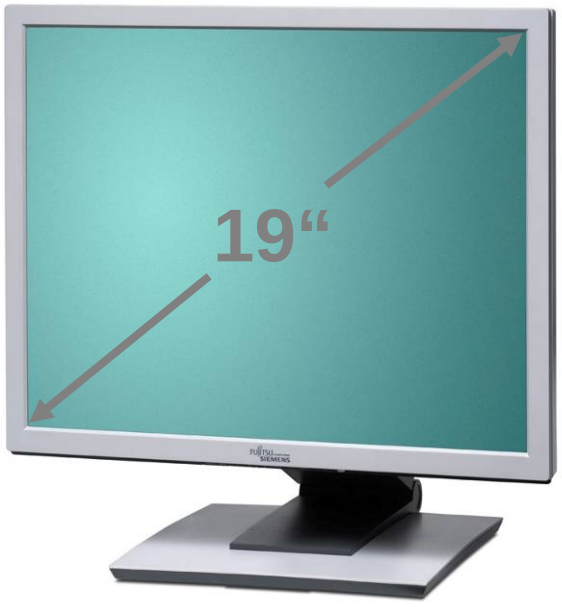

Dual Hinge Axis Management Stand

- Optimized ergonomic position close to desk adjustable
- 120mm Height adjust
- Rotation to portrait – Auto Pivot function
- +35° enhanced tilt
- +/-90° swivel

Representative Design

- Elegant slender body
- Space saving front frame
- Optimized cable guide
- Elegant connector cover

Comfortable usability and ready for Manageability

- DisplayView™ Auto Bright (adjustable Auto Brightness Control)
- DisplayView™ IT Suite
- Remote inventory gathering
- Remote execution of configuration tasks

Visible screen diagonal	19 inch (48 cm)
Panel technology	Premium VA with overdrive 8-bit, 16.7 Mio colors
Graphics display (dependent on graphics processor)	
Pixels	1280 x 1024 (recommended)
Pixels *)	1024 x 768
Pixels *)	800 x 600
Pixels *)	640 x 480
*) interpolated	
Text display (dependent on graphics processor)	
Pixels (max. 75 Hz)	720 x 400
Picture size	376 x 301 mm
Pixel Pitch	0.294 mm
Frequencies	
Horizontal	30 - 82 kHz
Vertical	56 - 76 Hz
Brightness typical	300 cd/m^2
Contrast typical	1500:1
Viewing angle typical	CR>10:1
Horizontal	178°
Vertical	178°
Response time typical	8 ms (grey-to-grey**)**
Plug & Play	VESA DDC CI
Ease-of-use menu	
Direct key access	auto adjust, mute, input select, OSD menu-lock
Brightness / contrast	brightness, contrast, black level, auto level
Image adjust	H, V position, clock, phase
Audio	volume, mute
Color	6500 K, 9300 K, native, sRGB, customer settings
OSD setup	language, position, timeout
Advanced	factory recall
Information	display mode resolution notifier
Dual Hinge Axis Management Stand	
Height-adjust range	120 mm
Rotation to portrait	90°
Tilt angle up to	-5° / + 35°
Swivel	+/-90°
Audio characteristics	
Volume control	digital
Audio signal input (from PC)	3.5 mm stereo phone jack
Sound output	2.0 W (L) + 2.0 W (R)

Electrical values	
Rated voltage	100 - 240 V
Frequency	50 - 60 Hz
Power draw typical	
Operation (w/o sound)	38 W
Power save mode	1 W
(Standby-, Suspend- and Off- mode)	
Soft switch off (front)	<1 W
Power switch off (rear)	0 W
Protection class	1
Temperatures / dimensions / weight	
Ambient temperature (to IEC721)	
Recommended range	15°C to 32°C
Limit	5°C to 35°C
Dimensions (landscape, lowest position)	
(H x W x D)	354 x 412 x 264 mm
Dimensions without base	
(H x W x D)	343 x 412 x 59 mm
Weight unpacked / packed	7.3 / 9.1 kg
without base unpacked	6.0 kg
Reliability typical	
MTBF (demonstrated)	70,000 h
Lifetime of LCD	50,000 h
(brightness > 50 % of original brightness)	
Compliance with standards	
Product safety	EN60950
Ergonomics	GS mark ISO13406-2 (Pixel fault class II)
Radiation immunity and suppression	CE certification according RFI to EC Directive 2004/108/EEC (EN55022/B, EN55024 EN61000-3-2/-3); TCO'03
Ecology	RoHS, WEEE, IT-Eco-declaration Energy Star (EPA 4.1)
Video input	1 x D-SUB analog 1 x DVI-D (24-pin) digital
Data cable (1.8 m)	D-SUB (15-pin) analog
detachable on display	DVI-D (24-pin) digital audio cable (1.8 m)
Power cable (1.8 m)	for wall socket Euro-Schuko-Type CEE7
Integrated power supply	
Plug type on display side	IEC-320-C13
Special features	Auto brightness control, DisplayView™ IT Suite (Click, AutoPivot) Kensington Lock prepared, standardized mounting interface according VESA FPMPMI (100 mm) Auto Pivot
Order code	S26361-K1208-V151

All rights reserved, including intellectual property rights. Technical data subject to modifications and delivery subject to availability. Any liability that the data and illustrations are complete, actual or correct is excluded.
Designations may be trademarks and/or copyrights of the respective manufacturer, the use of which by third parties for their own purposes may infringe the rights of such owner.
For further information see http://www.fujitsu-siemens.com/terms_of_use.html

Copyright © Fujitsu Siemens Computers 07/2008

Published by

Fujitsu Siemens Computers
http://www.fujitsu-siemens.com/

Company stamp